TMH-25T AIR HOIST

The TMH-25T is a 25 tonne chain hoist from Red Rooster Lifting. This is part of our hook suspension air hoist range for lifting equipment applications in industry.



The new **Red Rooster Lifting** TMH series air hoists have the highest lifting speed with the lowest headroom on the hoist market. With the high M4 classification of mechanism (ISO 4301-1) this high speed air hoist is extremely durable and will guarantee the continuity of your process. The TMH hoists are designed to operate at full lifting capacity with an air pressure from 4 – 6.3 bar. For full speed operation the hoist air pressure should be 6.3 bar.

STANDARD FEATURES

- Toku rotary vane motor
- Robust 3 step planetary gearbox
- Failsafe automatic internal disc brake
- Mechanical upper & lower switches
- Cast steel housing
- Internal silencing down to 82 dB(A)
- Alloy safety swivel hooks with safety catch
- Load chain 23.5 x 66mm of European manufacture to EN818-7
- Automatic load limiter

AVAILABLE OPTIONS

- Marine specification
- Special paint systems
- Corrosion protection
- UK Ex scheme or ATEX zone 1 specification
- Chain collectors (galvanised or stainless steel)
- Air Service units
- Radio control

 $\langle x 3 \rangle$

UK EX SCHEME ZONE 2 ATEX ZONE 2 AS STANDARD

T: +44 (0) 1651 872101 sales@redroosterlifting.com


REDROOSTERLIFTING.COM

TMH-25T AIR HOIST



DIMENSIONS

All measurements are in mm Information subject to change without notice

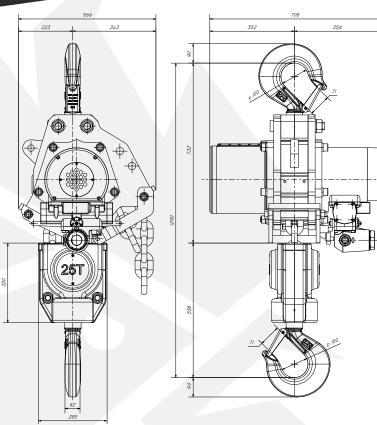

HOIST MODEL	TMH-25T
WLL	25000 kg
CHAIN FALLS	2
LIFTING SPEED WITH LOAD	1.4 m/min
LIFTING SPEED WITHOUT LOAD	2.7 m/min
LOWERING SPEED WITH LOAD	3.0 m/min
AIR CONSUMPTION LIFTING	108 l/sec
AIR CONSUMPTION LOWERING	180 l/sec
WORKING PRESSURE	4 - 6 Bar
AIR CONNECTION	11/2" BSP
MINIMUM HOSE DIA.	1 1/2"
AIR SERVICE	11/2" FLR
WEIGHT 3M HOL	581 kg
ADDITIONAL METRE HOL	24.4 kg

T: +44 (0) 1651 872101 sales@redroosterlifting.com

REDROOSTERLIFTING.COM